



CLARO

SWIMMING POOL & SPA CARTRIDGE FILTER

ENVIRONMENTALLY FRIENDLY WATER EFFICIENT FILTRATION

- Available in 4 common sizes from 75 to 200sqft
- No backwashing required, therefore no salt & pool chemicals in our waterways
- Super fine filtration for crystal clear water
- Filter media made from a durable high grade polyester with extra fine fibre blending
- Suitable for all types of pools & spas fresh & salt water
- Resistant to chemicals & corrosion
- Engineering grade ABS UV resistant plastic housing and components
- Compact & light weight ideal for tight spaces
- Internal air relief tube to eliminate trapped air in tank
- Easy to remove lock ring for quick cartridge access
- Multiple inlet/outlet ports for easy installation
- Barrel unions for easy installation& quick disconnection
- Supplied with quality stainless steel, oil filled pressure gauge
- 5 year limited tank warranty & 12 months warranty on other components





CLARO CR Series cartridge filters are made from high impact, non corrosive, U V stable materials capable of withstanding high pressures and the unrelenting harsh Australian climate. They are light weight, compact in size and excellent for applications where saving water is a priority and backwashing may not be practical.

The heart of the CLARO CR filter is the pleated filter element, manufactured from a durable high grade polyester with extra fine fibre blending for efficient filtrationThis results in crystal clear water with minimal filtration run time, thus saving valuable resources.

The CLARO CR cartridge filter incorporates a heavy duty lock ring, which makes removal of the cartridge element for cleaning extremely quick and easy.

In addition, all CLARO CR cartridge filters come complete with a high quality stainless steel oil filled pressure gauge, automatic internal air bleed tube, multiple inlet/outlet ports and barrel unions (for easy installation and quick disconnection) and a screw type manual air bleed valve.

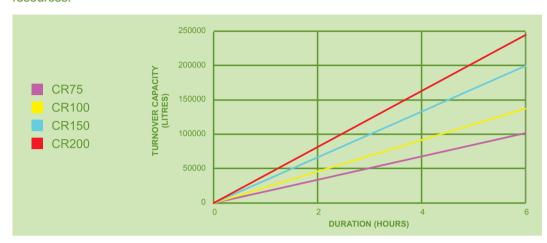



RELTECH CLARO CARTRIDGE FILTER MODEL	RELTECH MATCHING PUMP MODEL	A (MM)	B (MM)	C (MM)	FILTER AREA (M²/FT²)	PIPE SIZE (MM)	MAX FLOW RATE (L/MIN)
CR75	PR75	805	747	225	7.00/75	40	283
CR100	PR100-PR150	985	927	225	9.38/100	50	382
CR150	PR150-PR200	1165	1107	225	13.71/150	50	555
CR200	PR200	1345	1287	225	16.81/200	50	680

Maximum recommended working pressure: 350 kPa Maximum recommended water temperature: 40 C



Filter media made from a durable high grade polyester with extra fine fibre blending.

Durable, easy to clean and super efficient



Oil Filled Stainless Steel Gauge & Air Screw Type Bleed Valve



Disclaimer: No responsibility will be taken for any errors or omissions in product specifications. The manufacturer reserves the right to alter product specifications without notice.

Reltech Head Office 43-45 Kylta Road West Heidelberg Victoria 3081 Australia

Ph: + 613 9459 3838 Fax: + 613 9459 4038 Email: office@reltech.com.au